


# DATA SHEET

## GTB24VU1-HC - ENERGY BATTERY DATA



GTB24VU1-HC-A11

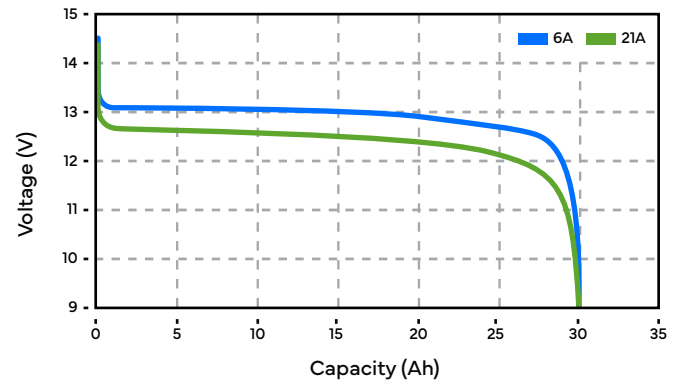

GTB24VU1-HC Discharge Rates at 25°C

### GENERAL SPECIFICATIONS


Nominal Capacity @ C/5 (Ah)	30
Average Operating Voltage @ C/5 (V)	25.6
Protection Control Module*	
Weight	12.5 lbs
Height	6.8 in
Width	5.2 in
Length	7.8 in

### RECOMMENDED OPERATING CONDITIONS

Continuous Discharge (A)	≤ 30
Pulse Discharge (A) ≤ 3 Seconds	≤ 90
Charge Current (A)	≤ 30
Charge Voltage Cutoff (V)	29.2
Discharge Voltage Cutoff (V)	20.0
High Operating Temp (°C)	60
Low Operating Temp (°C)	-20

### MAXIMUM OPERATING CONDITIONS

Heating on Charge	Opt.
Bluetooth	No
Canbus	No
Max Modules in Parallel	4
Max Modules in Series	4

 Manufactured and distributed by Grand Teton Energy Systems.

Performance may vary depending on application. All Specifications and operation conditions are subject to change without notice. This data is for evaluation purposes only. No guarantee is intended or implied by this data. MDS.

Version 002

### ADVANCED FEATURES

- ⚡ Short Circuit Protection
- ⚡ High Voltage Cut Off
- ⚡ Low Voltage Cut Off
- ⚡ Auto Cell Balancing
- ⚡ K2 Charger Available

### CONSTANT CURRENT TIME PROFILE @ 25°C

C/20 (1.5 A)	20 hrs
C/5 (6 A)	5.2 hrs
C/2 (15 A)	120 min
0.7C (43 A)	78 min

### DIMENSIONS

