

# DATA SHEET

12 V 280 Ah



## GENERAL SPECIFICATIONS

Model	GT12V280-LTSB-A20
Chemistry	LiFePO4
Nominal Voltage	12.8 V
Nominal Capacity	280 Ah
Nominal Energy	3584 Wh
Cycle Life	6000 cycles @ 80% DOD

## MECHANICAL SPECIFICATIONS

Dimensions (L x W x H)	20.5 in x 9.37 in x 8.7 in
Weight	63 lb
Casing Material	ABS
Terminal Type	M8
Enclosure Protection	IP65

## TEMPERATURE SPECIFICATIONS

Charge Temperature	0 °C to 55 °C
Discharge Temperature	-20 °C to 55 °C
Storage Temperature	-20 °C to 35 °C (< 18 months)

## OTHER SPECIFICATIONS

Self-Discharge	< 3% per month
Parallel/Series Connection	4 parallel / 4 series support
Bluetooth App	Yes
Low Temperature Heating	Yes
Accessory	LCD display



Manufactured and distributed by Grand Teton Energy Systems.

Performance may vary depending on application. All specifications and operating conditions are subject to change without notice. This data is provided for evaluation purposes only and does not imply any warranty or guarantee.

Grand Teton Energy Systems. All rights reserved.

Version 003 - Revised 11-17-2025

## CHARGE SPECIFICATIONS

Charge Voltage	14.6 V ± 0.2 V
Charge Mode	CC-CV
Recommended Charge Current	75 A
Maximum Charge Current	150 A
BMS Charge Cutoff Voltage	14.6 V
Reconnect Voltage	14.2 V

## DISCHARGE SPECIFICATIONS

Recommended Discharge Current	125 A
Maximum Continuous Discharge Current	250 A
Discharge Cutoff Voltage	10 V
Reconnect Voltage	10.8 V
Peak Discharge Current	500 A for 3 s

## COMPLIANCE SPECIFICATIONS


Certification (Battery Pack)	CE   UN38.3   MSDS
Certification (Cell)	UL1973
Shipping Classification	UN3480   Class 9

## BATTERY RECYCLE



NOTE: Do not mix with sealed lead-acid batteries when recycling. Refer to the Grand Teton user manual for proper operation.

## BATTERY DIMENSIONS

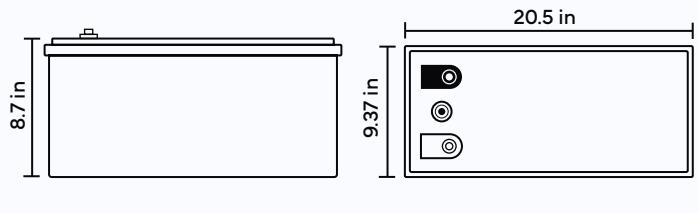

Threaded Hole  
M8 - 1.0 x 8 MM  
0.039 in x 0.315 in

