

DATA SHEET

36 V 30 A - Li-ion Battery Charger







CHARGER DISPOSAL



NOTE: Do not put Li-ion battery chargers in trash or curbside recycling. They can ignite when crushed or shorted in collection trucks or recycling facilities. Take to a proper collection point (Household Hazardous Waste (HHW) facility, e-waste event, or a retailer/manufacturer take-back program).

CHARGER DIMENSIONS

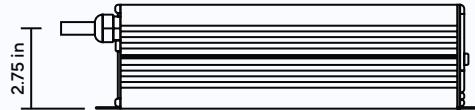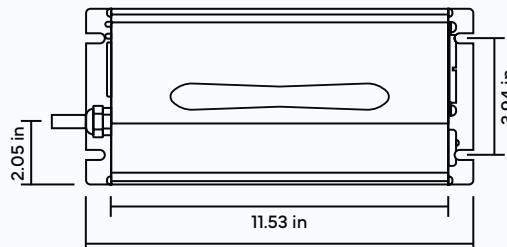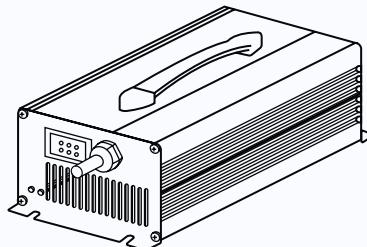

GENERAL SPECIFICATIONS

Model	GTC36V30A
AC Input Voltage	100-120 V
AC Input Current	21 A
Output Voltage	43.8 V
Charge Current	30 A

MECHANICAL SPECIFICATIONS

Dimensions (L x W x H)	11.02 in x 3.11 in x 7.17 in
------------------------	------------------------------

TEMPERATURE SPECIFICATIONS

Operating Temperature	-20 °C to 40 °C
Storage Temperature	-40 °C to 70 °C
Operating Humidity	5% to 95% RH
Storage Humidity	0% to 95% RH
Caution	For Indoor Use Only

COMPLIANCE SPECIFICATIONS

Certifications	CE
----------------	----



 Manufactured and distributed by Grand Teton Energy Systems.

Performance may vary depending on application. All specifications and operating conditions are subject to change without notice. This data is provided for evaluation purposes only and does not imply any warranty or guarantee. Grand Teton Energy Systems. All rights reserved.

Version 002 - Revised 12-10-2025